


TOLERANCES:

TO CENTER OF BOLT HOLES:  $\pm 0.1$ mm  
 TO CENTER OF PORT HOLES:  $\pm 0.2$ mm  
 TO CENTER OF PIN HOLES:  $\pm 0.1$ mm  
 TOLERANCE FOR PIN DIA.:  $\pm 0.2$ mm

D03

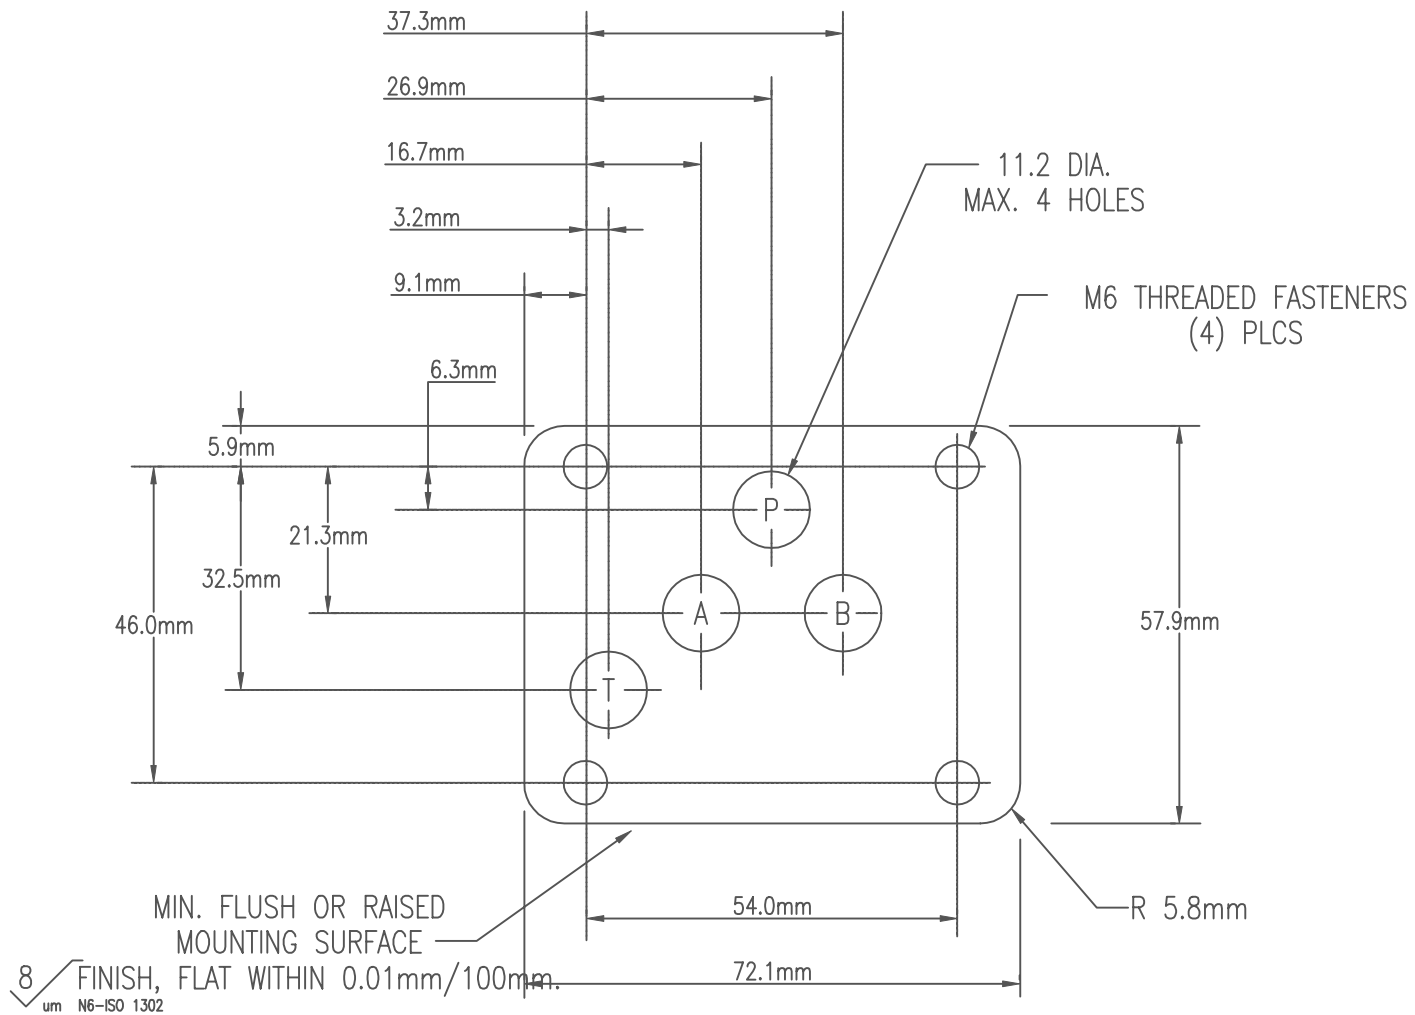

D05


TOLERANCES:

TO CENTER OF BOLT HOLES:  $\pm 0.1$ mm

TO CENTER OF PORT HOLES:  $\pm 0.2$ mm

TO CENTER OF PIN HOLES:  $\pm 0.1$ mm


TOLERANCE FOR PIN DIA.:  $\pm 0.2$ mm

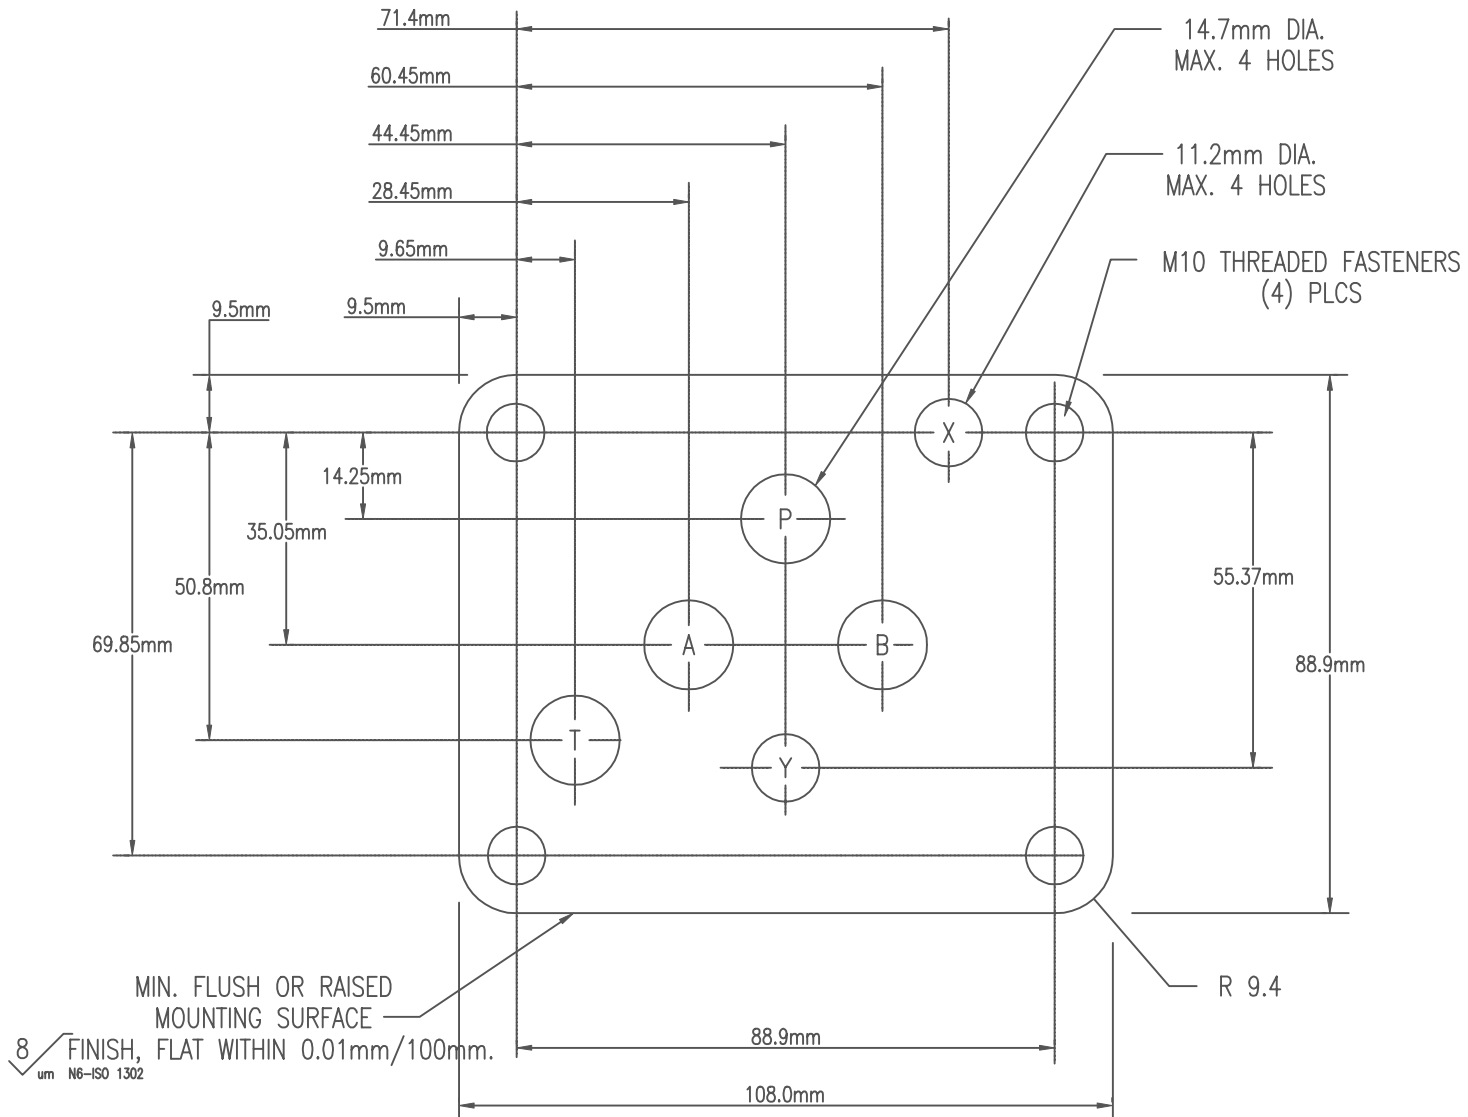

**TOLERANCES:**

- TO CENTER OF BOLT HOLES:  $\pm 0.1$ mm
- TO CENTER OF PORT HOLES:  $\pm 0.2$ mm
- TO CENTER OF PIN HOLES:  $\pm 0.1$ mm
- TOLERANCE FOR PIN DIA.:  $\pm 0.2$ mm


D06

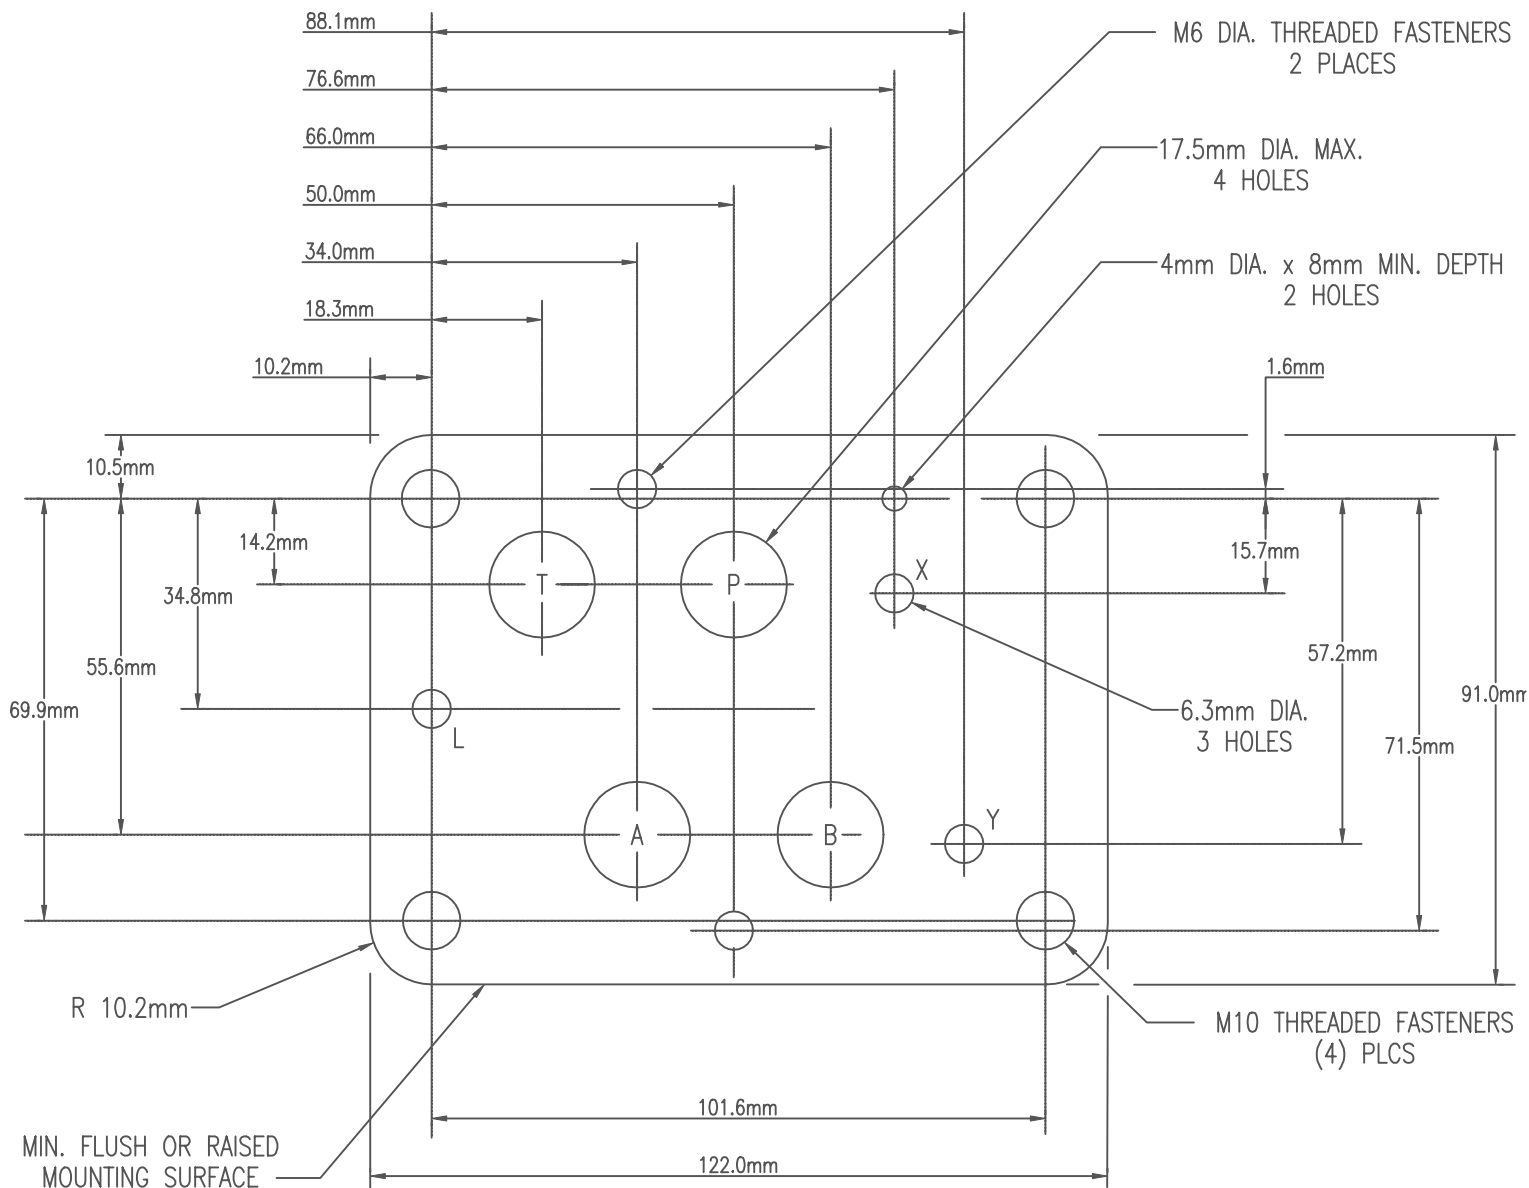

D07

TOLERANCES:


- TO CENTER OF BOLT HOLES:  $\pm 0.1$ mm
- TO CENTER OF PORT HOLES:  $\pm 0.2$ mm
- TO CENTER OF PIN HOLES:  $\pm 0.1$ mm
- TOLERANCE FOR PIN DIA.:  $\pm 0.2$ mm

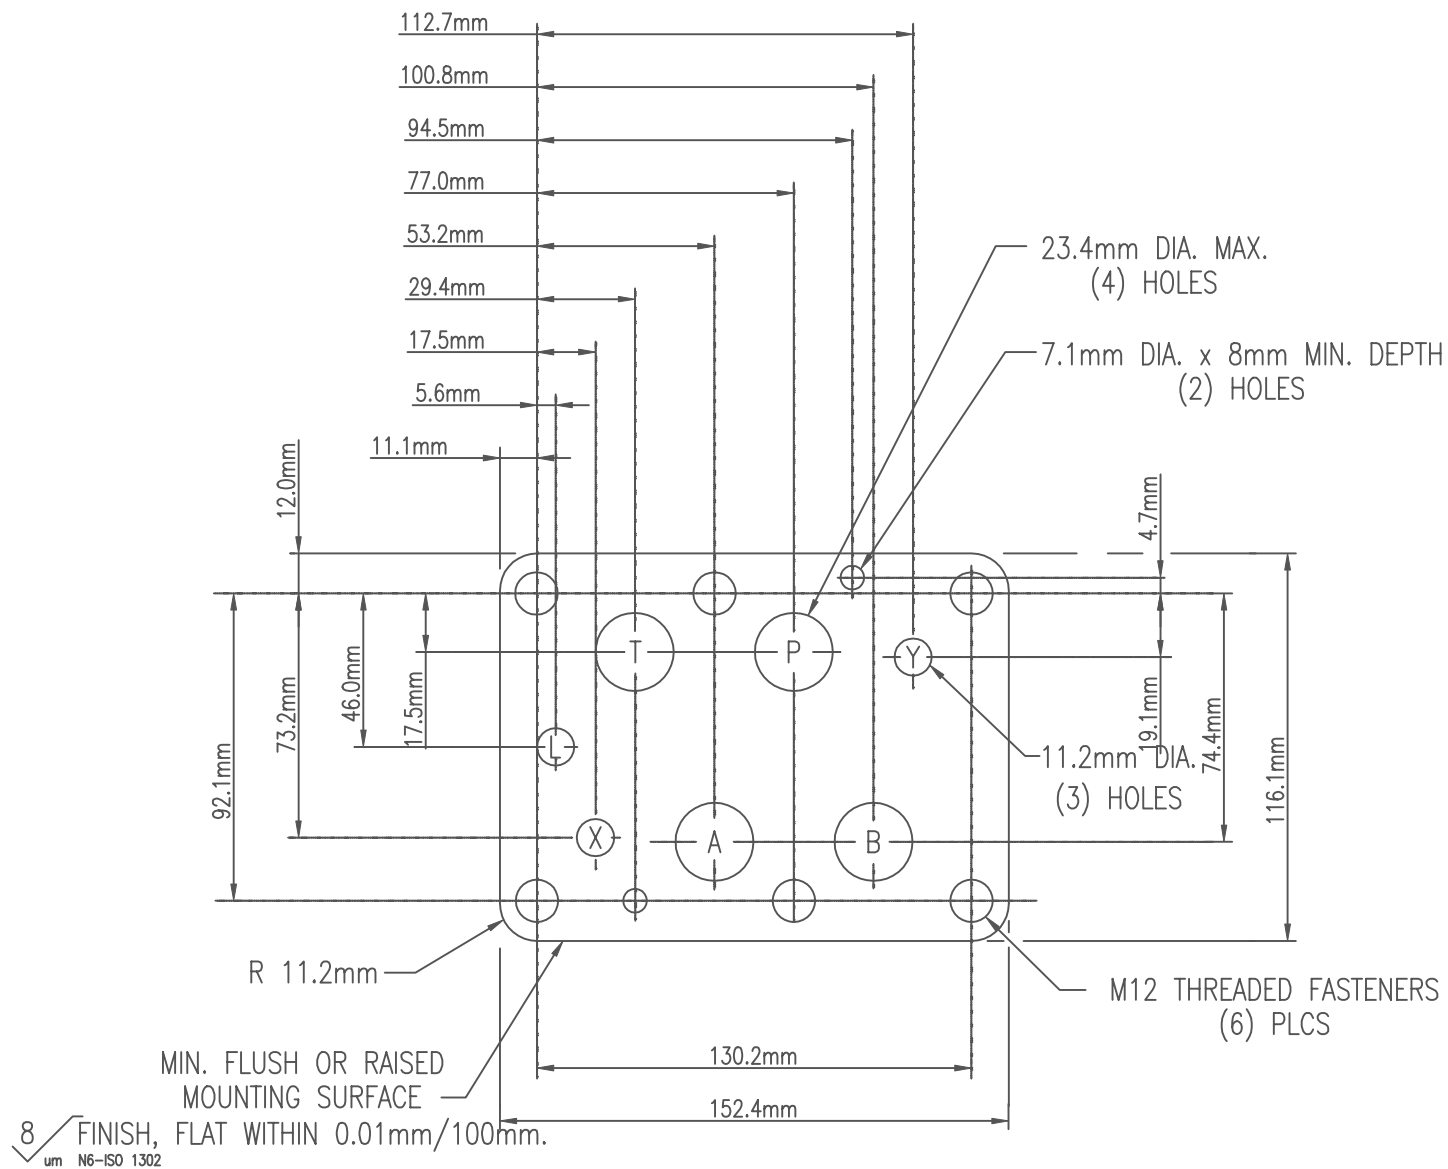

D08

TOLERANCES:

TO CENTER OF BOLT HOLES:  $\pm 0.1$ mm  
 TO CENTER OF PORT HOLES:  $\pm 0.2$ mm  
 TO CENTER OF PIN HOLES:  $\pm 0.1$ mm  
 TOLERANCE FOR PIN DIA.:  $\pm 0.2$ mm

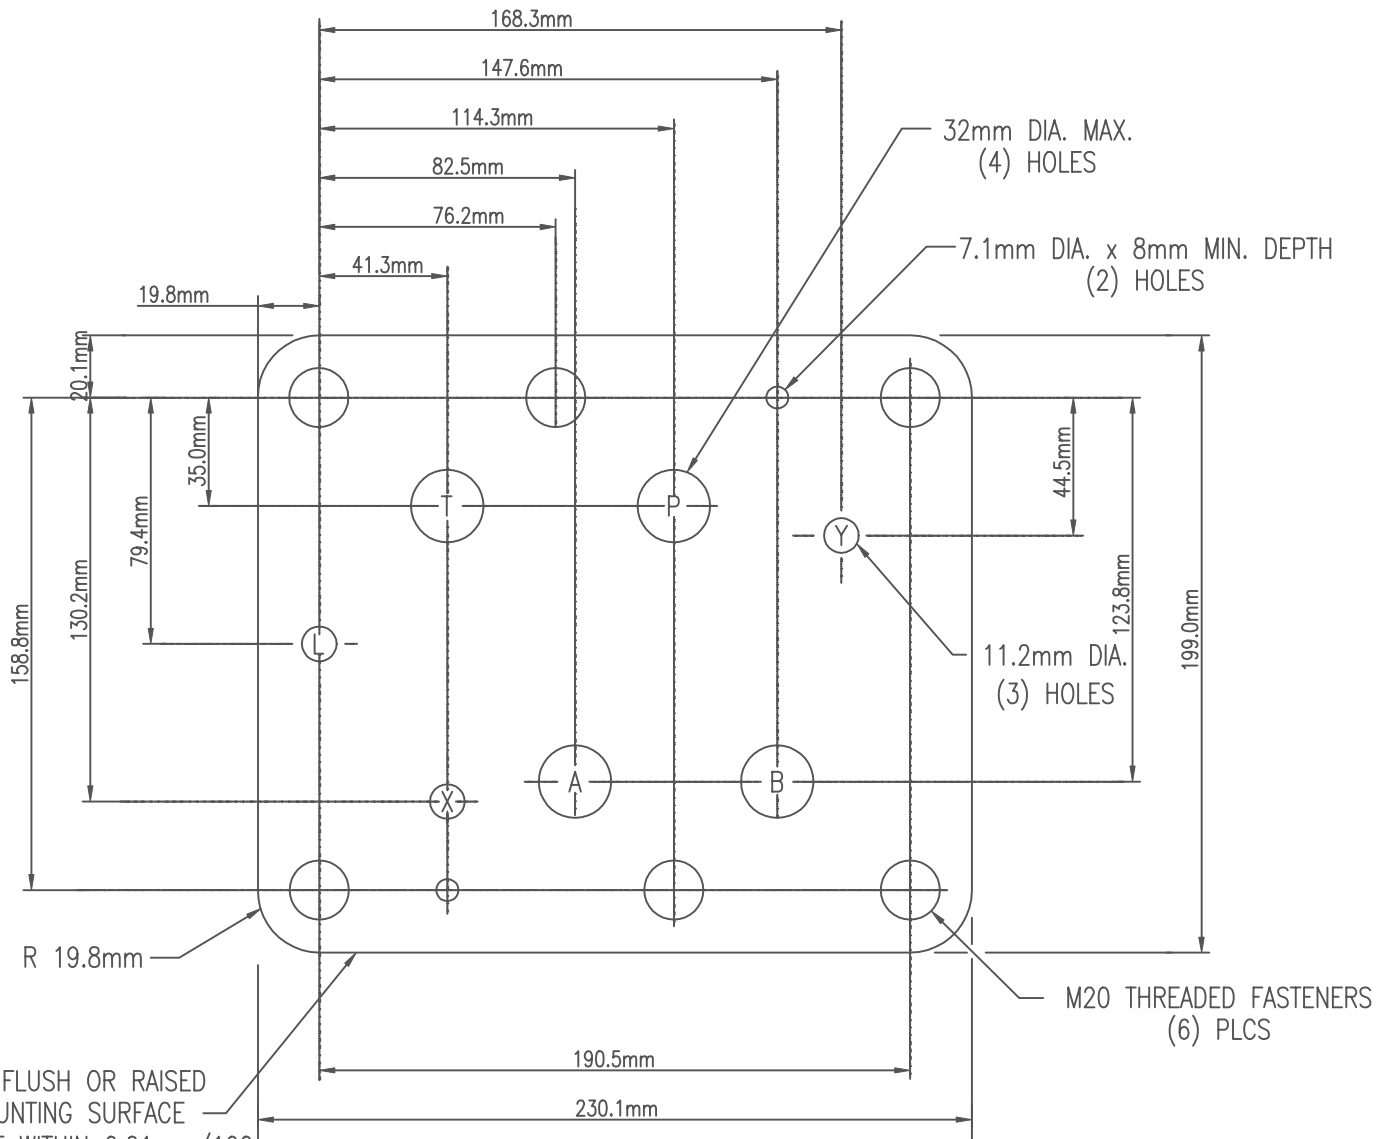

8  $\sqrt{\text{um}}$  FINISH, FLAT WITHIN 0.01mm/100mm.  
N6-ISO 1302

D10

TOLERANCES:

- TO CENTER OF BOLT HOLES:  $\pm 0.1\text{mm}$
- TO CENTER OF PORT HOLES:  $\pm 0.2\text{mm}$
- TO CENTER OF PIN HOLES:  $\pm 0.1\text{mm}$
- TOLERANCE FOR PIN DIA.:  $\pm 0.2\text{mm}$